

# Irrigation Water Reuse Reduces Effectiveness of Modernizing Irrigation Technologies Coupled with Enhanced Aquifer Recharge: Example from the Upper Snake River Basin, Idaho, USA

Shan Zuidema<sup>1\*</sup>, Richard B. Lammers<sup>1</sup>, Danielle S. Grogan<sup>1</sup>, Alex Prusevich<sup>1</sup>, Sarah Gilmore<sup>2</sup>, Paula Williams<sup>2</sup>




<sup>1</sup>University of New Hampshire, Institute for the Study of Earth, Oceans, and Space, Durham, NH, USA


<sup>2</sup>University of Idaho, Center for Resilient Communities, Moscow, ID, USA

## WATER BALANCE MODEL


WBM is a distributed hydrologic model utilizing conceptual soil, surface runoff, and shallow groundwater pools, a one-dimensional river network with hydrologic routing, and representations of dams, impervious surfaces, irrigation, and human water use. WBM tracks components of water fluxes, notably irrigation returns, through each represented pool and flux.

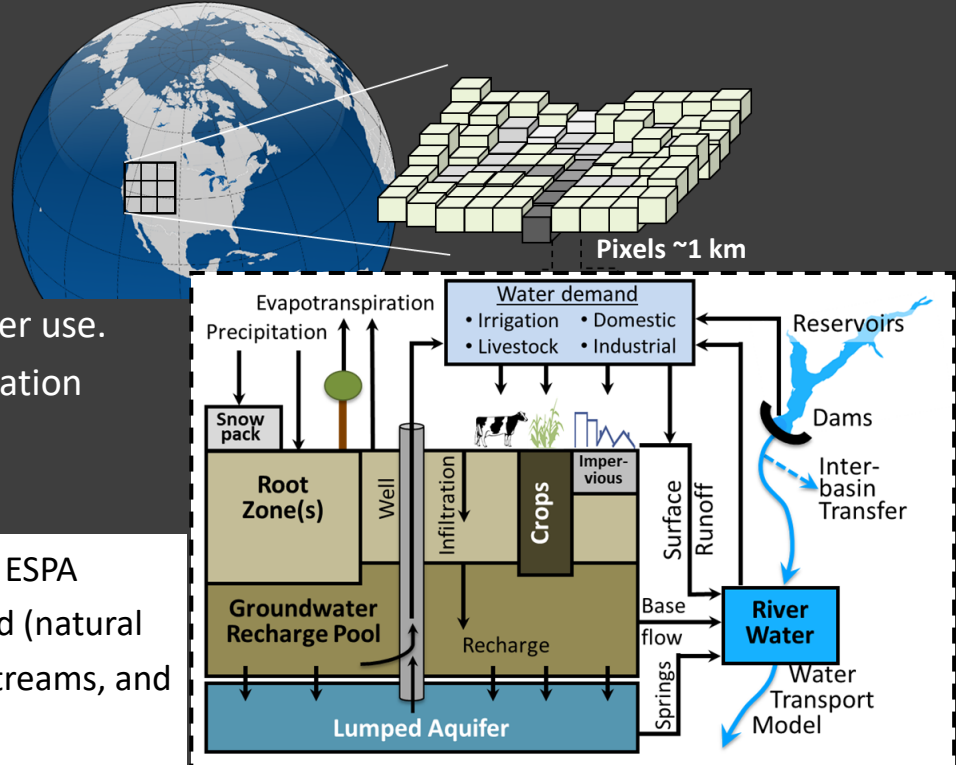

We applied a lumped aquifer representation to the entire ESPA (same domain as IDWR, 2014). Fluxes are both distributed (natural and incidental recharge, abstractions), and point (losing streams, and head-dependent springs).

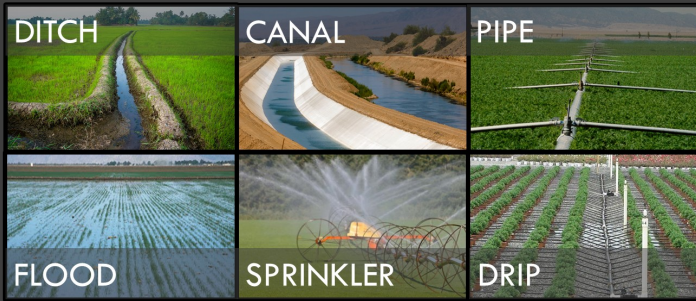


Irrigation technology from Jägermeyr et al. (2015)  
Technology by county from USGS Water Use Statistics.  
*Not limited by water rights.*

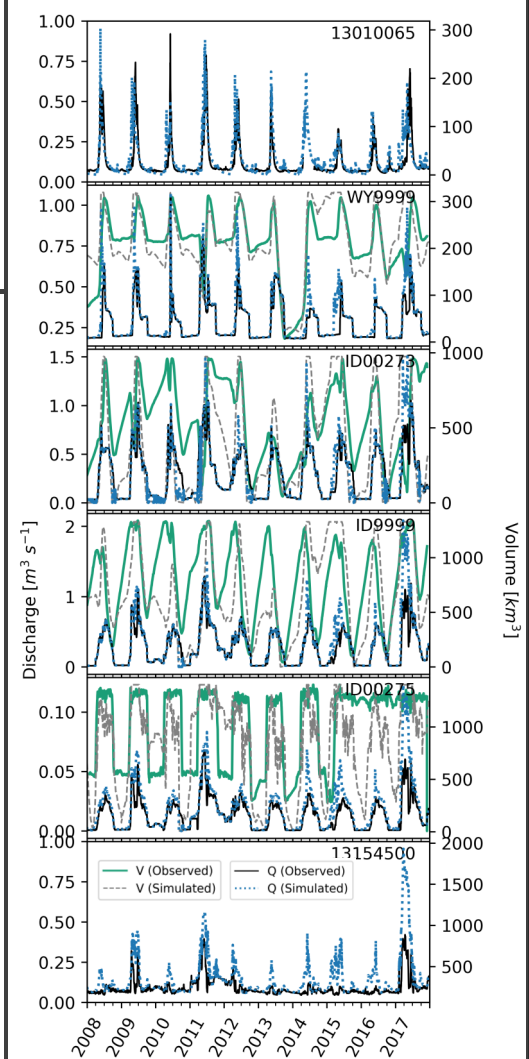

### Validation

4 criteria assessed model performance for natural and human controls of basin hydrology. Forced outflows at three major reservoirs in lieu of networked operations; a critical control in system (Rougé H14F-08).

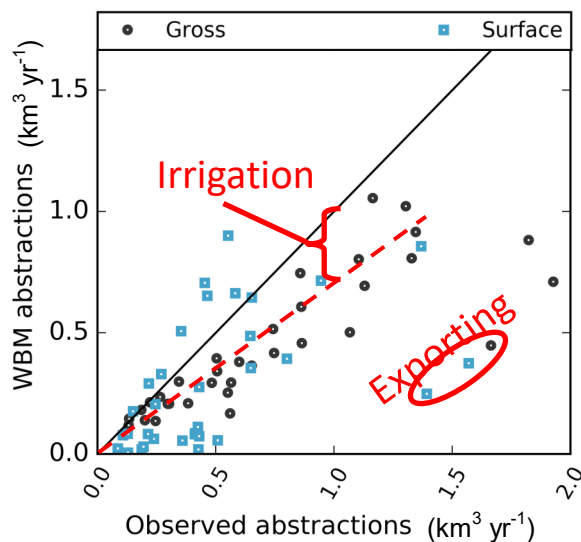

Accuracy in springflows evident as baseflow at King Hill, Idaho; lumped approach missed seasonality.

Metric	% BIAS	NSE
ESPA spring discharge	-0.69	0.11
Irrigation in 2010/15	-33	0.25
Headwater discharge	27.	0.40
Reservoir storage	-2.6	-0.33

Parameterizations of irrigation technology modernization.

We altered the distribution of surface (flood) to sprinklers for Eff.A—Eff.E.

Then we increased the fraction of direct (drip) irrigation for Eff.F—Eff.I.

We also represented declining proportions of open-surface conveyances (switching to pipes), and represented lining of all canals.

Parameterization	Fraction of			
	baseline surface irrigation	open-surface conveyances	Unlined canals	Fraction of direct irrigation
Baseline	1.0	0.83	1.0	0.00
Eff.A	0.89	0.82	0.95	0.10
Eff.B	0.86	0.80	0.8	0.10
Eff.C	0.82	0.70	0.60	0.10
Eff.D	0.77	0.60	0.40	0.10
Eff.E	0.73	0.50	0.20	0.10
Eff.F	0.53	0.40	0.15	0.33
Eff.G	0.40	0.30	0.10	0.50
Eff.H	0.27	0.15	0.05	0.67
Eff.I	0.0	0.0	0.0	1.00

# Irrigation Water Reuse Reduces Effectiveness of Modernizing Irrigation Technologies, when not Coupled with Enhanced Aquifer Recharge: Example from the Upper Snake River Basin, USA



Shan Zuidema<sup>1\*</sup>, Richard B. Lammers<sup>1</sup>, Danielle S. Grogan<sup>1</sup>, Alex Prusevich<sup>1</sup>, Sarah Gilmore<sup>2</sup>, Paula Williams<sup>2</sup>

<sup>1</sup>University of New Hampshire, Institute for the Study of Earth, Oceans, and Space, Durham, NH, USA <sup>2</sup>University of Idaho, Center for Resilient Communities, Moscow, ID, USA

Poster 488759, Session II, AGU Chapman Conference on the Quest for Sustainability of Heavily Stressed Aquifers at Regional to Global Scales, 2019-Oct-23, Universitat Politècnica de València, España



## Knowledge Gap


Modernizing irrigation technology and implementing Enhanced Aquifer Recharge are adaptations to reduce drawdown in stressed aquifers. How does modernizing irrigation technology reduce the system scale reuse of incidental returns, and does recharge mitigate the loss of this "source" of water?

Effective Irrigation Efficiency increased more slowly than

Classical Irrigation Efficiency when simulated technologies were modernized.


**When coupled with enhanced recharge, reuse through actual recovery increases the effectiveness of modernization.**

Increasing recovery is the key to adaptation in conjunctively managed systems.




As both adaptations increase, changes in outlet discharge more closely match aquifer drawdown (never perfectly), approaching parity between aquifer and downstream shortfalls.

- A.1 As technology modernizes, less recharge is needed than incidental returns lost.
- A.2 Increasing irrigation efficiency yields greater drawdown than discharge gained.
- A.3 Enhanced aquifer recharge at an efficiency level exceeded drawdown without.

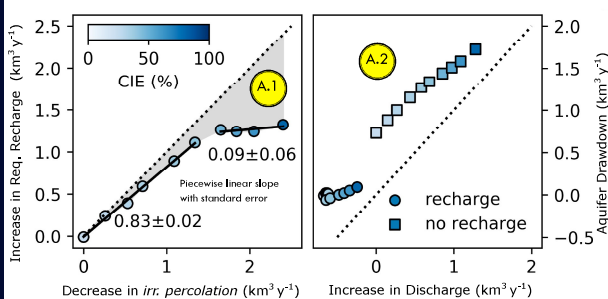

Left: Recharge required above baseline to stabilize aquifer plotted against the reduced irrigated percolation from baseline. At 95% classical efficiency (CIE) the benefit overcomes baseline recharge requirement.

Right: Aquifer drawdown is always greater than the change in outlet discharge from baseline.




Change in aquifer storage (top) and recharge required for aquifer stability (bottom) for each pair of parameterizations. Stabilization is less than 10% of baseline drawdown.

Drawdown is less than recharge required. Solid lines (bottom) depict the negotiated recharge mandate (lower), and the estimated maximum feasible recharge capacity (upper).

Reuse of returns declines with increasing efficiency of irrigation technology, but recharge resulted in more AND more effective reuse.

- B.1 Irrigation reuse was always greater with recharge represented.
- B.2 Beneficial consumption of reuse increased with recharge.
- B.3 Reuse was underestimated in the model.

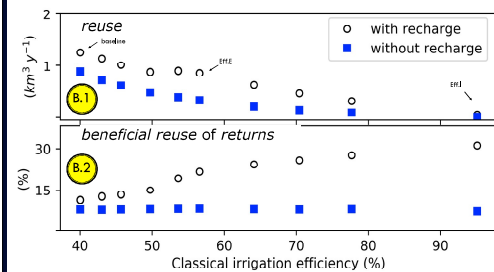

Volume flux of reuse (top) and percentage of beneficial use from prior incidental returns across gradient of classical irrigation efficiency of parameterizations.


## Terminology

- beneficial** Evapotranspiration of supplied irrigation water by crops (FAO56).
- irrigated percolation** Net percolation from irrigation minus local abstractions.
- recharge** Managed or Enhanced Aquifer Recharge.
- returns** incidental returns/percolation. Non-consumptive loss.
- reuse** Abstraction of prior returns for irrigation.
- baseline** Flux or storage at contemporary best model estimate.

## Model


The Water Balance Model (WBM) is a rasterized, conceptual hydrologic model with explicit representations of irrigation technology, dams, and sectoral water allocations. Daily time-step. 780m resolution.

## Setting and experimental design

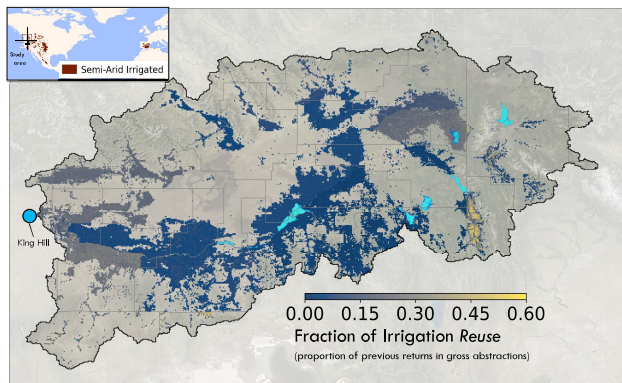

The Upper Snake River Basin (USRB) of southern Idaho is semi-arid with robust dairy and commodity crop agriculture supported by seasonal snow melt and the highly productive Eastern Snake Plain Aquifer (ESPA). Surface irrigation from 1900-1950 added storage to ESPA. Recent adjudication requires aquifer storage to remain at current head. Conjunctive management focuses on managed recharge, with continued irrigation technology modernization.

We simulated 10 parameterizations that increased irrigation technological efficiency from contemporary to extremely efficient between 2008 and 2017 with and without sufficient recharge to stabilize the aquifer. Aquifer stabilization by manual calibration.



Online version of this poster available at: [www.wsg.usg.edu/publications/](https://www.wsg.usg.edu/publications/) or scan the QR code above.

Online version includes supporting material including model structure, input data sources, validation against observations, citations.


Shan Zuidema, [shan.zuidema@unh.edu](mailto:shan.zuidema@unh.edu)  
<https://www.wsg.usg.edu>  
<https://esrc.unh.edu>




Supported under

NSF SES 1639524  
DOE DE-SC001612

## Fate of Abstractions

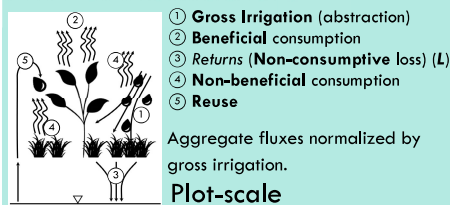

WBM tracks incidental returns through each pool and flux within the model, permitting characterization of the ultimate fate of all returns. The system-scale diagram below represents fates that are proportional to each flux at baseline.

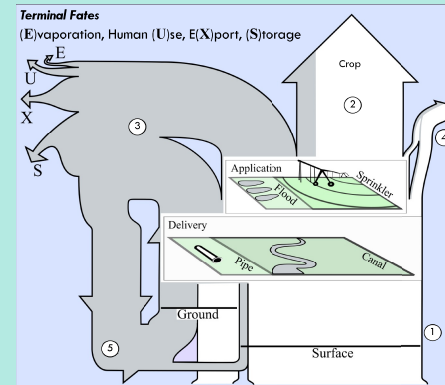

Pristine abstractions (in white), Incidental returns and reuse (in gray). Recoverable Fraction (RF) (Simons et al. 2015) = 53% (baseline), 5% for Eff.I. Observed recovered fraction implies 1e-4 (Eff.I) to 0.19 (baseline) cycles of reuse.



# Irrigation Water Reuse Reduces Effectiveness of Modernizing Irrigation Technologies Coupled with Enhanced Aquifer Recharge: Example from the Upper Snake River Basin, Idaho, USA

Shan Zuidema<sup>1\*</sup>, Richard B. Lammers<sup>1</sup>, Danielle S. Grogan<sup>1</sup>, Alex Prusevich<sup>1</sup>, Sarah Gilmore<sup>2</sup>, Paula Williams<sup>2</sup>



<sup>1</sup>University of New Hampshire, Institute for the Study of Earth, Oceans, and Space, Durham, NH, USA

<sup>2</sup>University of Idaho, Center for Resilient Communities, Moscow, ID, USA

## **Works referenced**

- Contor, B. A. and Taylor, R. G.: Irrigation and Drainage, 62(3), 273–280, doi:[10.1002/ird.1717](https://doi.org/10.1002/ird.1717), 2013.
- Dieter, C. A., et al.: Estimated use of water in the United States in 2015, 2018.
- Grogan, D. S., et al.: Environ. Res. Lett., 12(3), 034017, doi:[10.1088/1748-9326/aa5fb2](https://doi.org/10.1088/1748-9326/aa5fb2), 2017.
- Idaho Water Resources Board: Eastern Snake Plain Aquifer Comprehensive Aquifer Management Plan, 2009.
- Idaho Water Resources Board: ESPA Review of Comprehensive Managed Aquifer Recharge Program, 2016.
- Grafton, R.Q., et al.: Science, 361(6404), 2018.
- Jägermeyr, J., et al.: Hydrol. Earth Syst. Sci. 19(7), doi: [10.5194/hess-19-3073-2015](https://doi.org/10.5194/hess-19-3073-2015), 2015.
- Kjelstrom, L. C.: Streamflow gains and losses and groundwater budgets for the Snake River plain, 1995.
- Lankford, B.: Agricultural Water Management, 108, 27–38, doi:[10.1016/j.agwat.2011.08.010](https://doi.org/10.1016/j.agwat.2011.08.010), 2012.
- Le Van Chinh: Faculty of Science, University of Copenhagen, Kbh., 2012.
- Maupin, M. A., et al. : Estimated use of water in the United States in 2010, 2014.
- Plummer, L. n., et al.: Ground Water, 38(2), 264–283, doi:[10.1111/j.1745-6584.2000.tb00338.x](https://doi.org/10.1111/j.1745-6584.2000.tb00338.x), 2000.
- Portmann, F. T., et al.: Global Biogeochemical Cycles, 24(1), doi:[10.1029/2008GB003435](https://doi.org/10.1029/2008GB003435), 2010.
- Simons, G. W. H., et al.: Journal of Hydrology, 522, 558–571, doi:[10.1016/j.jhydrol.2015.01.016](https://doi.org/10.1016/j.jhydrol.2015.01.016), 2015.
- Simon, D.: Master of Science, University of New Hampshire, 2018.
- Stewart, R.J., et al.: Water Resources Research, 47(1), doi:[10.1029/2010WR009896](https://doi.org/10.1029/2010WR009896), 2011.
- Wollheim, W.M., et al.: Global Biogeochem. Cycles, 22(2), doi:[10.1029/2007GB002963](https://doi.org/10.1029/2007GB002963), 2008.